

THE NEW VALUE FRONTIER



CBN Inserts
for Machining Hardened Material

H Chipbreaker
Series

CBN Inserts for Machining Hardened Material

H Chipbreaker Series

NEW



Unique Molded Chipbreaker Provides Excellent Chip Control when Machining Hardened Material

Excellent Chip Control with Molded Chipbreaker

3 Chipbreaker Styles for a Wide Range of Machining Applications

KBN05M Insert Grade with Superior Oxidation Resistance and Wear Resistance

Small D.O.C., for Hardened Steel Finishing



HH Chipbreaker
(55HRC~)



HL Chipbreaker
(~55HRC)

1st
Recommendation

Large D.O.C., for Removing the Carburized Layer



HD Chipbreaker



H Chipbreaker Series

Unique Molded Chipbreaker Provides Excellent Chip Control when Machining Hardened Material
3 Chipbreaker Styles for a Wide Range of Machining Applications

1 Excellent Chip Control with Molded Chipbreaker

Molded chipbreaker delivers excellent chip control and low cutting force with edge preparation and sharp cutting performance

Chip Control Comparison (Internal Evaluation)




With Chipbreaker
(HH Chipbreaker)



Without Chipbreaker
(Conventional)

Cutting Conditions: $V_c = 150$ m/min, $a_p = 0.2$ mm,
 $f = 0.15$ mm/rev, 60HRC, Wet, CN**120408 Type after 21min Workpiece: SCM415, 60HRC

Cutting Force Comparison (Internal Evaluation)

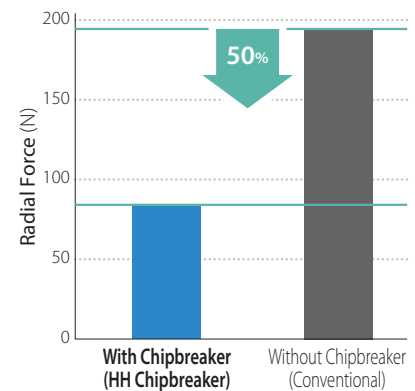

Cutting Conditions: $V_c = 150$ m/min, $a_p = 0.2$ mm,
 $f = 0.15$ mm/rev, Wet, CN**120408 Type
Workpiece: SCM415, 60HRC

2 3 Chipbreaker Styles for a Wide Range of Machining Applications


Various applications and cutting conditions are possible with 3 unique chipbreaker designs

Chipbreaker	Application	Recommended Cutting Range
HH  1st Recommendation	Hardened Steel Finishing 55HRC or more	Small D.O.C. ($a_p = 0.1 \sim 0.3$ mm)
HL 	Hardened Steel Finishing 55HRC or less	
HD 	Removing the Carburized Layer (From Carburized Layer to Unhardened Layer)	Large D.O.C. ($a_p = 0.3 \sim 0.7$ mm)

Molded chipbreaker provides excellent chip control and Low cutting force when machining hardened material

1st
Recommendation

HH Chipbreaker (Workpiece 55HRC or more)




Twin Dots

Breaks chips into small pieces

Wide Bump

Provides stable chip curls

Chipbreaker cross-section




2-step rising face prevents chip clogging

Stable chip control for hardened workpieces which are 55HRC or more

Chip Control Comparison (Internal Evaluation)




HH Chipbreaker

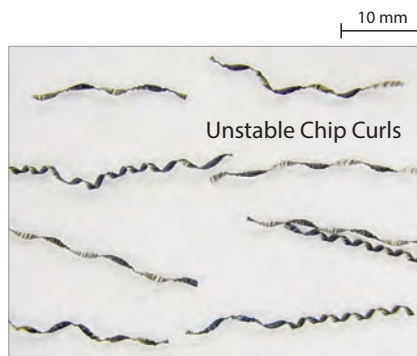

Competitor A
(With Chipbreaker)


Cutting Conditions: $V_c = 150 \text{ m/min}$, $a_p = 0.2 \text{ mm}$, $f = 0.20 \text{ mm/rev}$, Wet, CN**120408 Type
Workpiece: SCM415H, 55HRC

Cutting Force Comparison (Internal Evaluation)

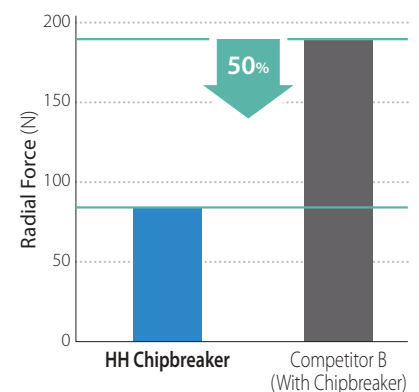

Cutting Conditions: $V_c = 150 \text{ m/min}$, $a_p = 0.2 \text{ mm}$, $f = 0.15 \text{ mm/rev}$, Wet, CN**120408 Type
Workpiece: SCM415H, 60HRC

HL Chipbreaker (Workpiece 55HRC or less)



Wide Bump

Chipbreaker cross-section



Rake Surface


Stable chip control for softer interior of hardened materials

Stable chip curls for workpieces which are 55HRC or less

Chip Control Comparison (Internal Evaluation)



HL Chipbreaker



Competitor C (With Chipbreaker)

Cutting Conditions: $V_c = 150 \text{ m/min}$, $a_p = 0.2 \text{ mm}$, $f = 0.20 \text{ mm/rev}$, Wet, CN**120408 Type Workpiece: SCM415H, 50HRC


4

HD Chipbreaker for Removing the Carburized Layer


Large D.O.C.
 (ap = 0.3 ~ 0.7 mm)

Maintains stable machining during applications with several passes and varied hardness


HD Chipbreaker for Carburized Layer to Unhardened Layer

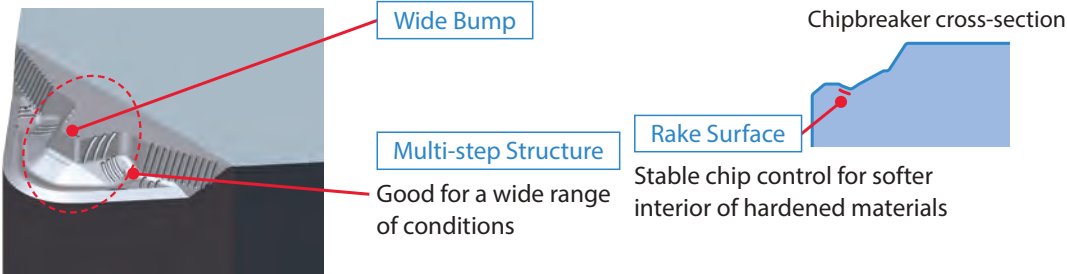


Tool Path Example

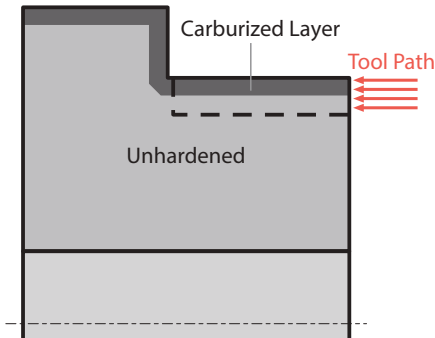

Cutting Force in Unhardened Layer Comparison (Internal Evaluation)

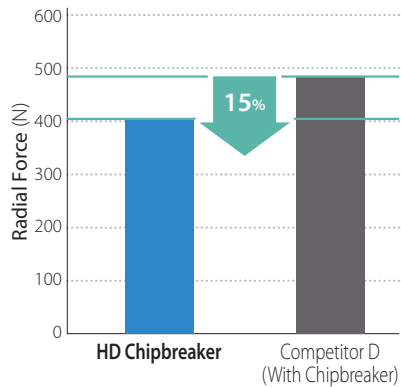

Breaks chips into small pieces at different D.O.C. and hardness

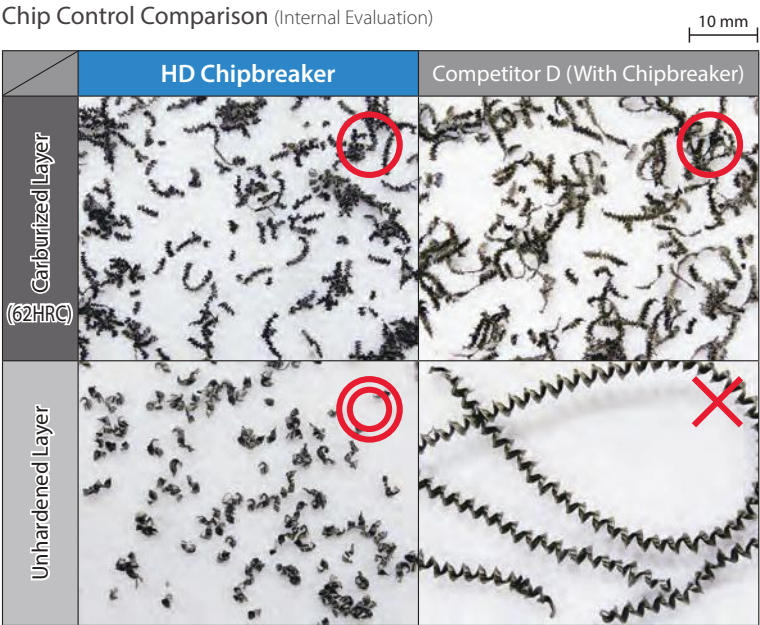

Cutting Conditions: Vc = 150 m/min, ap = 0.5 mm, f = 0.15 mm/rev, Wet, CN**120408 Type Workpiece: SCM415H


MEGACOAT CBN KBN05M

Hybrid Grain Structure for High Hardness and High Strength
MEGACOAT Ensures Longer Tool Life

Combination of a Hybrid Grain Structure and MEGACOAT Provides Superior Oxidation Resistance and Wear Resistance

Hybrid Grain Structure

Mixed structure of micro grain CBN and coarse grain CBN provides high hardness, toughness and thermal resistance characteristics.

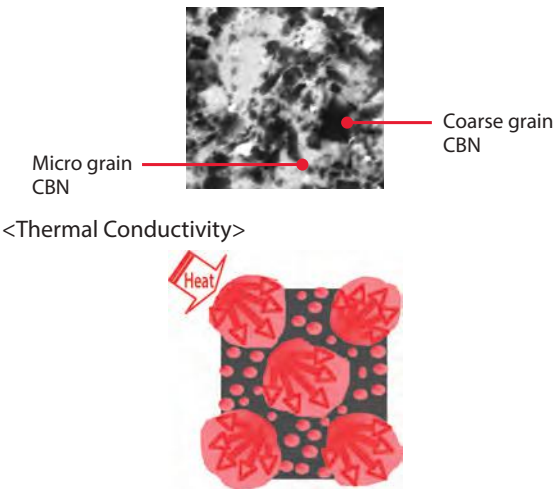


Coarse grain CBN quickly transfers heat

MEGACOAT

Superior Oxidation Resistance and Wear Resistance

Coating Properties

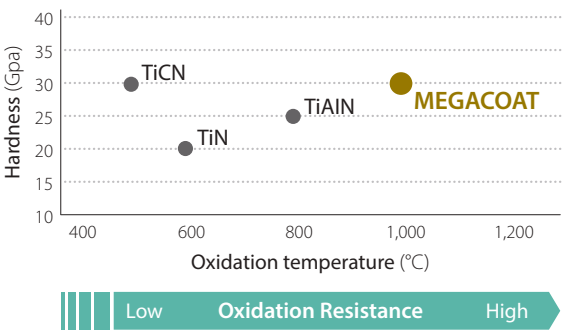


Case Studies

Pinion Chromium Molybdenum Hardened Steel (55 ~ 62HRC)

Vc = 130 m/min
ap = 0.05 mm
f = 0.08 mm/rev
Dry

CNGM120408ME-HH



Tool Life

HH Chipbreaker 70 pcs/edge

Tool Life
2.3x

Competitor F (Without Chipbreaker) 30 pcs/edge

The HH chipbreaker maintained 2.3 times longer tool life than Competitor F.


The molded chipbreaker provided stable chip control.

(User Evaluation)

Plate Chromium Steel Carburizing Treatment (Surface Hardness 550Hv or more)

Vc = 160 m/min
ap = 0.5 mm
f = 0.2 mm/rev
Wet

CNGM120408ME-HD



Tool Life


HD Chipbreaker 500 pcs/edge

Tool Life
1.3x


Competitor E (Without Chipbreaker) 400 pcs/edge

Chip Control

HD Chipbreaker












Competitor E



The HD chipbreaker maintained 1.3 times longer tool life than Competitor E. Chip control was stable.

(User Evaluation)

H Chipbreaker Series Description

Edge Preparation		Cutting Edge Spec.		★: 1st Recommendation									
E		Honed				H	Hardened Material (Continuous/Interruption)					★	
S01235		0.12 × 35° Chamfered and Honed											
Shape				Description		Edge Preparation	Dimensions (mm)					No. of Cutting edge	MEGACOAT CBN
							IC	S	D1	RE	LE		KBN05M
55HRC~			CNGM120404ME-HH		E	12.7	4.76	5.16	0.4	2.6	2	●	
	Small D.O.C.		CNGM120408ME-HH						0.8	2.6		●	
			CNGM120412ME-HH						1.2	2.5		●	
			DNGM150404ME-HH						0.4	2.6		●	
	Small D.O.C.		DNGM150408ME-HH						0.8	2.2		●	
			DNGM150412ME-HH						1.2	1.9		●	
~55HRC			CNGM120404ME-HL		E	12.7	4.76	5.16	0.4	2.6	2	●	
	Small D.O.C.		CNGM120408ME-HL						0.8	2.6		●	
			CNGM120412ME-HL						1.2	2.5		●	
			DNGM150404ME-HL						0.4	2.6		●	
	Small D.O.C.		DNGM150408ME-HL						0.8	2.2		●	
			DNGM150412ME-HL						1.2	1.9		●	
Carburized Layer to Unhardened Layer			CNGM120404ME-HD		S01235	12.7	4.76	5.16	0.4	2.6	2	●	
	Large D.O.C.		CNGM120408ME-HD						0.8	2.6		●	
			CNGM120412ME-HD						1.2	2.5		●	
			DNGM150404ME-HD						0.4	2.6		●	
	Large D.O.C.		DNGM150408ME-HD						0.8	2.2		●	
			DNGM150412ME-HD						1.2	1.9		●	

● : Standard Stock

● : Standard Stock

Recommended Cutting Conditions

Chipbreaker	Workpiece	Application	Insert Grades	Min. - Recommendation - Max.		
				Cutting Speed Vc (m/min)	ap (mm)	f (mm/rev)
HH	Hardened Material (55HRC or more)	Finishing	KBN05M	100-150-200	0.1-0.2-0.3	0.1-0.15-0.25
HL	Hardened Material (55HRC or less)					
HD	Hardened Material (From Carburized Layer to Unhardened Layer)	Removing the Carburized Layer	KBN05M	100-150-200	0.3-0.5-0.7	0.1-0.15-0.25