

ProStock™

Small Footprint, High Capacity Storage



With the high-security dispensing of the ProStock, you can manage the distribution of hundreds of items at the point of use all within a very small footprint. Carousel dispensing provides the flexibility to issue one or multiple items while eliminating the unproductive time of walking to and from a tool crib. The pie-shaped sections of the carousel allow for easy configuration of multiple-sized items such as safety supplies, cutting tools, gauges, and batteries. Driven by CribMaster software, the ProStock reduces stockouts, lowers costs, and controls inventory consumption.

- High security for controlled consumption
- Simple carousel reconfiguration for flexible storage
- Dispense single items or kitted items
- Optional lockers for large item storage
- Carousels are self-calibrating and field-configurable

ProStock Configurations

The ProStock comes standard with 10 carousels. Optional pop-open lockers may be substituted for carousels. The ProStock can be paired with any traditional vending solution and can function as a main or auxiliary unit.

Suggested Inventory Types

The ProStock is tailored to dispense MRO, PPE, durables, and cutting tools such as:


- Gloves
- Inserts, taps, and dies
- Batteries
- Safety glasses
- Aerosols
- Power tools
- Hand tools



Carousel Configurations

Usable Carousel Bin Dimensions										
Section Divide	1	2	3	4	5	6	7	8	9	10
Front Width (in)	1.2	2.4	3.6	4.8	6	7.2	8.4	9.6	10.8	12
Front Width (cm)	3.05	6.1	9.14	12.19	15.24	18.29	21.34	24.38	27.43	30.48
Back Width (in)	0	0.19	0.38	0.56	0.75	0.94	1.13	1.32	1.51	1.7
Back Width (cm)	0	0.48	0.97	1.42	1.9	2.39	2.87	3.35	3.84	4.32

Each section divide depth is 9.6 in / 24.38 cm and height is 4.75 in / 12.07 cm.
Carousels are field-configurable. Maximum carousel capacity is 35 lbs / 15.88 kg.

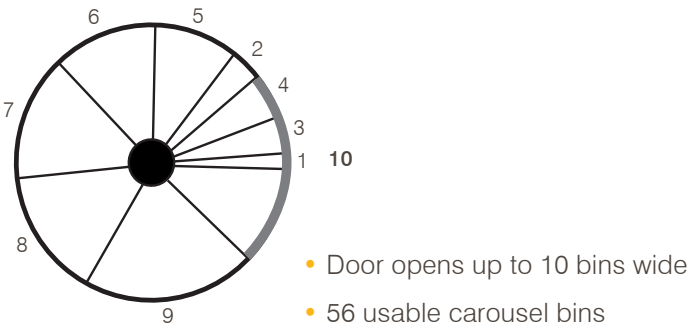


Carousel Features and Benefits

- Self-calibrating drawer saves time with easy and accurate setup
- Motorized, push-button door eliminates manual closing
- Modular components allow for easy maintenance and improve uptime
- Lightweight design is robust, durable, and easy to use

Locker Configurations

Usable Locker Depth and Height				
Depth	28 in		71.12 cm	
Height	4 in		59.69 cm	
Usable Locker Width				
Doors	1	2	3	6
Width (in)	23.5	11	7.5	3.5
Width (cm)	59.69	27.94	19.05	8.89

One locker configuration replaces one carousel.
Maximum locker capacity is 100 lbs / 45.36 kg.

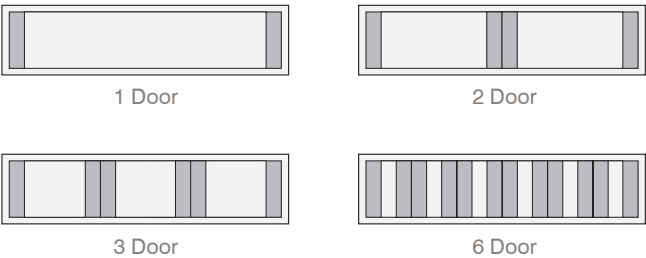

ProStock Specs

Main Exterior Dimensions		
Height	83 in	210.82 cm
Width	34.25 in	87 cm
Depth	37.38 in	94.93 cm
Auxiliary Exterior Dimensions		
Height	83 in	210.82 cm
Width	29.88 in	75.88 cm
Depth	31.5 in	80.01 cm
Weight		
Main	685 lbs	311 kg
Auxiliary	635 lbs	288 kg
Power Requirements		
Amps	3	1.5 (EU)
Voltage	120	230 (EU)
Operating Environment		
Temperature	32°F to 95°F	0°C to 35°C
Humidity	20% to 85% (no condensation)	
Technical Info		
CE Compliant		
Windows OS		



CribMaster Global Headquarters
1955 West Oak Circle
Marietta, GA 30062
Toll Free // 1.877.960.0602
www.cribmaster.com