

Secure Storage, Flexible Dispensing



The CribMaster ToolBox provides sustainable point-of-use dispensing to help you manage and control cutting tools, MRO, PPE, consumable items, or any type of indirect material. Driven by CribMaster software, this high-security device allows your operation to run more smoothly, reduce waste, lower costs, and increase productivity.

- High security for controlled consumption
- Enhanced product visibility with clear front door
- Single item or kitted item dispensing
- Ample storage for cost-effective control
- Easily expanded with auxiliary units

ToolBox Configurations

The ToolBox is available in 6-shelf and 7-shelf configurations. Offering a flexible dispensing layout, this solution can be configured to address your specific inventory needs. The ToolBox can be paired with any traditional vending solution and can be a main or auxiliary unit.

Suggested Inventory Types

The ToolBox is tailored to dispense small PPE and cutting tools such as:

- Inserts
- Batteries
- Safety glasses
- Filters
- Tape
- Fasteners



ToolBox Configurations

Single Helix Configuration (2.5 in / 6.35 cm diameter)

Helix Count	5	7	8	9	10	12	15	18	24	32
Slot Depth (in)*	4.04	2.9	2.51	2.25	2.02	1.66	1.3	1.05	0.75	0.53
Slot Depth (cm)*	10.26	7.37	6.38	5.72	5.13	4.22	3.3	2.67	1.91	1.35

Large Helix Configuration (3.75 in / 9.53 cm diameter)

Helix Count	4	5	7	9	10	12	15			
Slot Depth (in)*	4.1	3.45	2.58	2.05	2.01	1.55	1.24			
Slot Depth (cm)*	10.41	8.76	6.55	5.21	5.11	3.94	3.15			

Dual Helix Configuration (5 in / 12.7 cm diameter)

Helix Count	5	7	10	12	15	18	24			
Slot Depth (in)*	4.04	2.9	2.02	1.66	1.3	1.05	0.75			
Slot Depth (cm)*	10.26	7.37	5.13	4.22	3.3	2.67	1.91			

Each single helix shelf can hold 10 SKUs in a 2.5 in / 6.35 cm opening. Each large and dual helix shelf can hold 5 SKUs in a 5 in / 12.7 cm opening.

Shelf height is 6 to 8 in / 15.24 to 20.32 cm. Single coil maximum capacity is 10 lbs / 4.54 kg. Maximum shelf capacity is 100 lbs / 45.36 kg.

ToolBox Specs

Main Exterior Dimensions

Height	73 in	185.42 cm
Width	39 in	99.06 cm
Depth	40 in	101.6 cm

Auxiliary Exterior Dimensions

Height	73 in	185.42 cm
Width	39 in	99.06 cm
Depth	36 in	91.44 cm

Weight

Main - 6 Shelf	630 lbs	286 kg
Auxiliary - 6 Shelf	580 lbs	263 kg
Main - 7 Shelf	650 lbs	295 kg
Auxiliary - 7 Shelf	600 lbs	272 kg

Power Requirements

Amps	3	1.6 (EU)
Voltage	115	230 (EU)

Operating Environment

Temperature	35°F to 110°F	1°C to 43°C
Humidity	20% to 85% (no condensation)	

Technical Info


CE Compliant	
Windows OS	

Accessories

- Vertical partition or flip bar pusher to vend narrow items such as end mills, insert boxes, and pens
- Riser platform to vend short items such as battery packs
- Auger helix for vending small items such as single cutting tool inserts and welding tips (available in 30 coil pitch with 0.5 in / 1.27 cm slot depth)
- V-channel mini helix to vend small narrow items such as single batteries

Mini Helix Configuration

Helix Count	10	20	32
Slot Depth (in)*	1.87	0.96	0.53
Slot Depth (cm)*	4.75	2.44	1.35

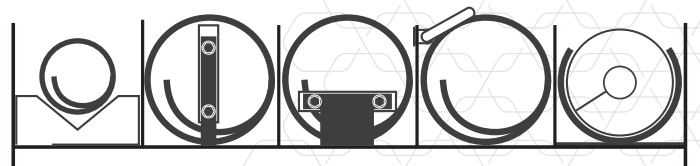

V-channel
& Mini Helix

Vertical
Partition

Riser
Platform

Flip Bar
Pusher

Auger



CRIBMASTER

CribMaster Global Headquarters
1955 West Oak Circle
Marietta, GA 30062

Toll Free // 1.877.960.0602
www.cribmaster.com

* Not the actual size of opening. Slot depth is measured from the peak of one spiral pitch to the next.

©2016-2018 CribMaster. All rights reserved. The information contained herein is subject to change without notice.
DMA.MKT.012b

STANLEY